

ALTA BOILER & COMBI

Adaptive Gas Valve Technology:


- No touch gas adaptive technology
- No throttle and offset adjustments on start up
- Automatically maintains proper air/fuel ratio
- Quick start up with fewer steps

No Outdoor Sensor Required:


- Rate-based temperature reset, continually assesses indoor environmental conditions, adjusting water temperature accordingly

Low Gas Pressure Capability:

- | | |
|--|-------------|
| • Natural Gas | • LP |
| 2.5" to 14"WC | 8" to 14"WC |
| Other brands require a minimum of 5"WC | |

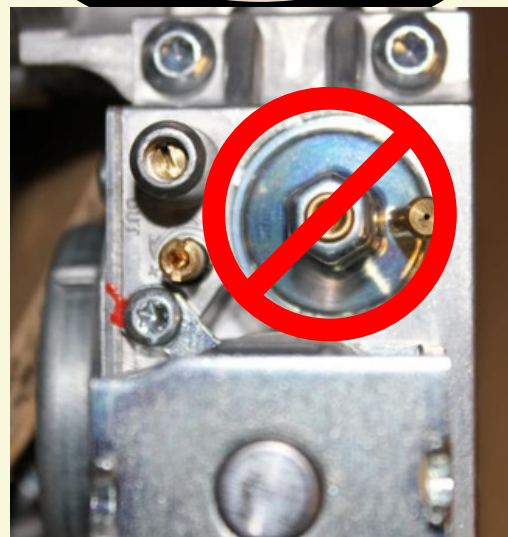

Simple Switch LP Conversion:

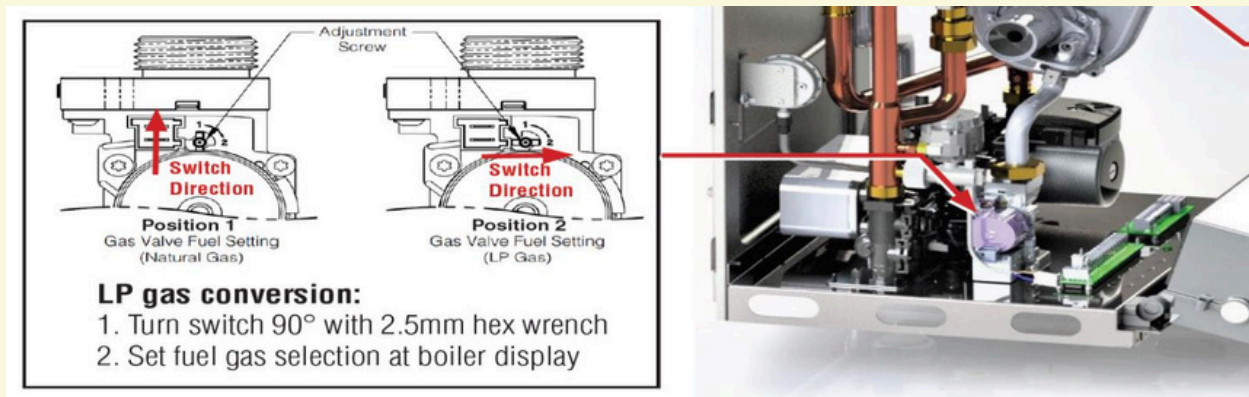

2" Top venting connections on ALL boilers:

- No adapters required
- Save with 2 inch venting, up to 70 eq.feet
- Reduced risk of flue gas recirculation
- 3 inch can be used for longer vent lengths

Start Up Savings:

Features and Benefits	Combi Boilers		Heat Only Boilers
Gas adaptive control technology	200		200
"Cycle Time" reset / no outdoor sens	100		100
Simple switch LP conversion	100		100
Low gas pressure capability*			
Circulator provided with ALL models			400
2-inch venting on ALL models (NG &	200		200
Alta Combi FastPipe P/S manifold	300		
Total Savings	900		1000
* Feature only			